



SINCE 1962
Coated Abrasives Conversion Equipment
made in Switzerland


Packing table type PTZ

The packing table type PTZ facilitates the rewinding of flexible and coated endless abrasive belts. After rewinding, the roll can be efficiently packed on the large working surface.



Packing table type PTZ

- » For belt widths up to 150 mm
Winding shafts adjustable in height
50 ... 350 mm (optional)
- » Adjustable center distance 45 ... 240 mm
- » Winding drive 60 min⁻¹
- » Time lag of the winding drive
(slow start of the winding)
- » Roll holder for packaging material mounted
on the table

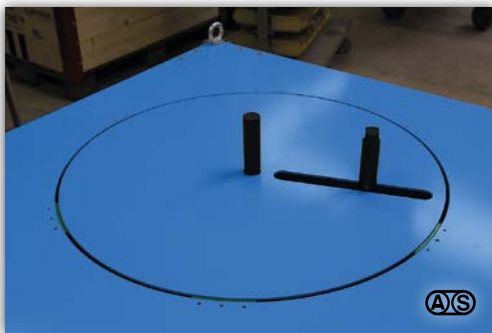

Height of winding shafts and
center distance are adjustable

Technical data

- Standard electric supply 400 V - 3 ph - 50 Hz.
- Dimensions approx. (WxHxD) 1200 x 1250 x 1200 mm.
- Working height 900 mm
- Machine color blue RAL 5023.
- Other colors/electric supply on request.

Rewinding

- The rewinding starts by pushing the foot pedal and stops by releasing the pedal.
- Clockwise rotation.
- Drip pan for grain dust under the table (available on request).
- Emergency button to stop the machine.
- Torque control through flat drive belt.

Options

- Winding shafts adjustable in height 50 ... 350 mm
(depending on the material width).
- Drip pan for grain dust under the table.



Torque control through flat drive belt